

Memo

Aero_M_FuelCostsDueToAircraftSystems
_07-12-11.doc

From:

Prof. Dr. Dieter Scholz
Aero – Aircraft Design and Systems Group
Department F+F, HAW Hamburg
Berliner Tor 9, 20099 Hamburg

Phone: 040 - 709 716 46
E-Mail: info@ProfScholz.de
WWW: <http://Aero.ProfScholz.de>

Date: 2007-12-11

To:

Dr. Christian Müller (Mueller@fzt.haw-hamburg.de)
Aero – Aircraft Design and Systems Group

Fuel Costs due to Aircraft Systems

Fuel costs are differentiated by means of their physical origin. This approach helps to pinpoint the origin of fuel costs and allows to effectively find measures to reduce fuel consumption. Causes of fuel consumption due to aircraft systems, subsystems, or single parts are:

- fuel costs due to transportation of *fixed mass* (mass that does not vary in flight)
- costs due to mechanical *power off-takes* from the engines (e.g. by electrical generators)
- fuel costs due to *bleed air off-takes*,
- fuel costs due to *ram air off-takes*,
- fuel costs due to *additional drag* caused by the presents of aircraft systems, subsystems, or single parts (e.g. due to drain masts).

In addition to the fuel necessary for the above physical causes X, fuel is needed to carry the fuel for causes X during later flight intervals. The fuel needed to carry fuel is calculated just as calculating fuel used for fixed mass.

The calculation fuel required during flight interval i is done by a summation over time intervals from the last interval n back to interval i . Summation takes place backwards from landing to take-off.



D. Scholz: Fuel Costs due to Aircraft Systems – Calculated from Small Time Intervals

$$C_{F, SYS} = C_{F, mf} + C_{F, P} + C_{F, B} + C_{F, R} + C_{F, D}$$

due to: fixed mass, power off-takes from the engines,
bleed air off-takes, ram air off-takes, additional drag

$$C_{F, X} = m_{fuel, X} \cdot P_F \cdot n_{t, a}$$

$m_{fuel, X}$ mass of fuel consumed due to **cause X** (*mf, P, B, R, D*) during the whole flight

P_F price of fuel

$n_{t, a}$ number of flights (trips, *t*) per year (annum, *a*)



The fuel consumption is calculated for 7 **flight phases** i :

$i = 1$, engine start,

$i = 2$, taxi,

$i = 3$, take-off,

$i = 4$, climb,

$i = 5$, cruise,

$i = 6$, descent,

$i = 7$, landing, taxi, engine shut down.

Here alternative approach:

The fuel consumption is calculated for many very small time intervals.

All **consumptions are added up** for total fuel consumed.

Summation over time intervals from interval n back to interval i yields required fuel mass in interval i

Note: Summation backwards from landing to take-off!

$$m_{fuel,j,X,f} = \sum_{i=n}^j \dot{m}_{fuel,i,X,f} \cdot \Delta t \quad \text{fuel due to cause } X \text{ directly: } f$$

$$m_{fuel,j,X,m} = \sum_{i=n}^j \dot{m}_{fuel,i,X,m} \cdot \Delta t \quad \text{fuel due to fuel mass due to } X: m$$

$$m_{fuel,j,X} = m_{fuel,j,X,f} + m_{fuel,j,X,m}$$

$$m_{fuel,X} = m_{fuel,1,X} = m_{fuel,1,X,f} + m_{fuel,1,X,m}$$

Fuel consumption due to **fixed mass** $m_{i,mf}$ during flight phase i

$$\dot{m}_{fuel,i,mf} = m_{i,mf} \cdot SFC_i \cdot g \cdot \left(\frac{\cos \gamma_i}{L/D_i} + \sin \gamma_i \right)$$

Fuel consumption due to **transported fuel mass (fuel for later time intervals)** $m_{fuel,i,X,m}$ during flight phase i


$$\dot{m}_{fuel,i,X,m} = m_{fuel,i,X,f} \cdot SFC_i \cdot g \cdot \left(\frac{\cos \gamma_i}{L/D_i} + \sin \gamma_i \right)$$

Fuel consumed due to **power off-takes** P_i during flight phase i

$$(SFC)_P = \frac{k_P \cdot SFC_i \cdot m_{A/C} \cdot g}{n_E \cdot T_{T/O}} \cdot \left(\frac{\cos \gamma_i}{L/D_i} + \sin \gamma_i \right)$$

$T_{T/O}$ take-off thrust (one engine)

n_E number of engines

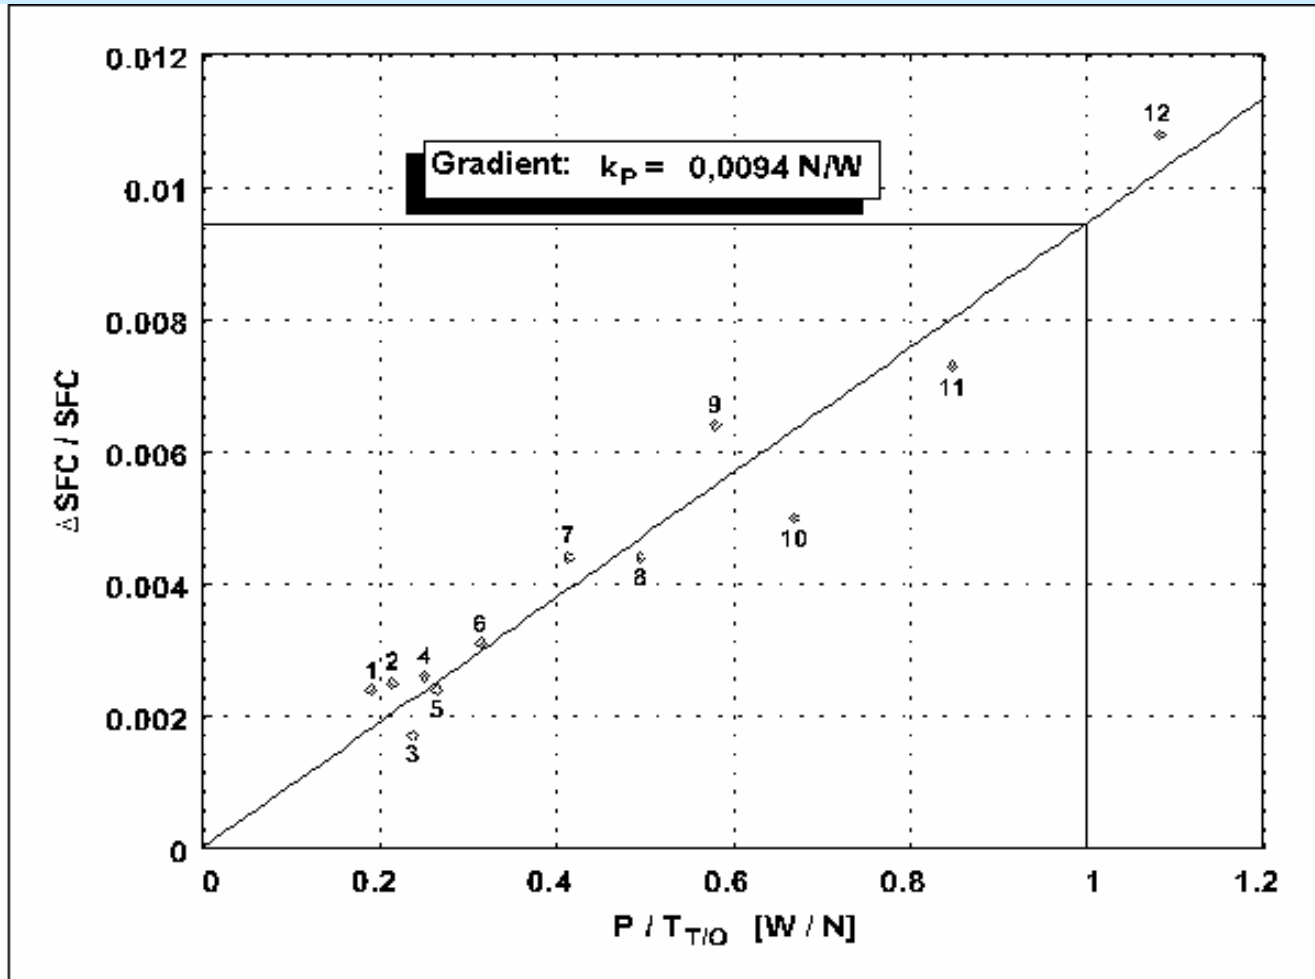

Gradient
 k_p
for power
off-takes

k_p from
Gasturb-
Examples
(AHLEFELDER):
0.0116 N/W

Fuel consumption due to **power off-takes** P_i during flight phase i

$$\dot{m}_{fuel,i,P,f} = P_i \cdot (SFC)_P$$

$(SFC)_P$	Mittelwert:	0,097 kg/kWh (SCHOLZ)
	A300:	0,125 kg/kWh (DECHOW)
	A400M:	0,167 kg/kWh (BRIX)
	Gasturb-Examples:	0,176 kg/kWh (AHLEFELDER)



Fuel consumption due to **bleed air off-takes** during flight phase i
(following SAE AIR 1168/8)

$$\dot{m}_{fuel,i,B,f} = k_B \cdot T_{tb} \cdot \dot{m}_B$$

\dot{m}_B bleed air mass flow

T_{tb} turbine inlet temperature

$$k_B = 3.015 \cdot 10^{-5} 1/K$$

New approach:

$$\dot{m}_{fuel,i,B,f} = k_B \cdot T_{tb} \cdot \dot{m}_B = k_B^* \cdot \dot{m}_B$$

Fuel consumption due to **bleed air off-takes** during flight phase i
 (following AHLEFELDER)

$$\dot{m}_{fuel,i,B,f} = k_B^* \cdot \dot{m}_B$$

$$k_B^* \quad 0,0335 \quad (\text{AIR 1168/8})$$


$$k_B^* = k_{BB} \left(\frac{p_3}{p_2} \right)^y \quad \frac{p_3}{p_2} \quad \text{is compressor (overall) pressure ratio}$$

CFM56-5C: 37,4

$$k_{BB} : 4,99 \cdot 10^{-3} \quad (\text{at relative enthalpy of } 0,63)$$

$$y : 0,475$$

$$k_B^* \quad 0,028 \quad (\text{AHLEFELDER, CFM56-5C})$$

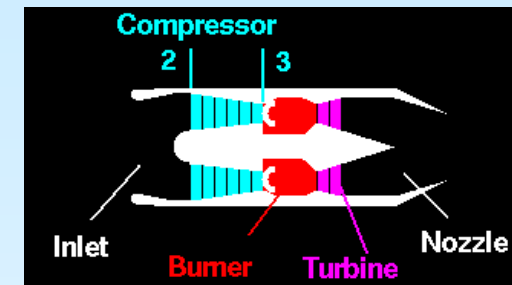



Fuel consumption due to **ram air off-takes** Q_i during flight phase i


$$\dot{m}_{fuel,i,R,f} = SFC_i \cdot \rho_i \cdot Q_i \cdot v_i$$

Q required air flow rate
 ρ air density; v true air speed
 SFC Specific Fuel Consumption

Fuel consumption due to **additional drag** D_i during flight phase i

$$\dot{m}_{fuel,i,D,f} = SFC_i \cdot D_i$$

Number of flights per year

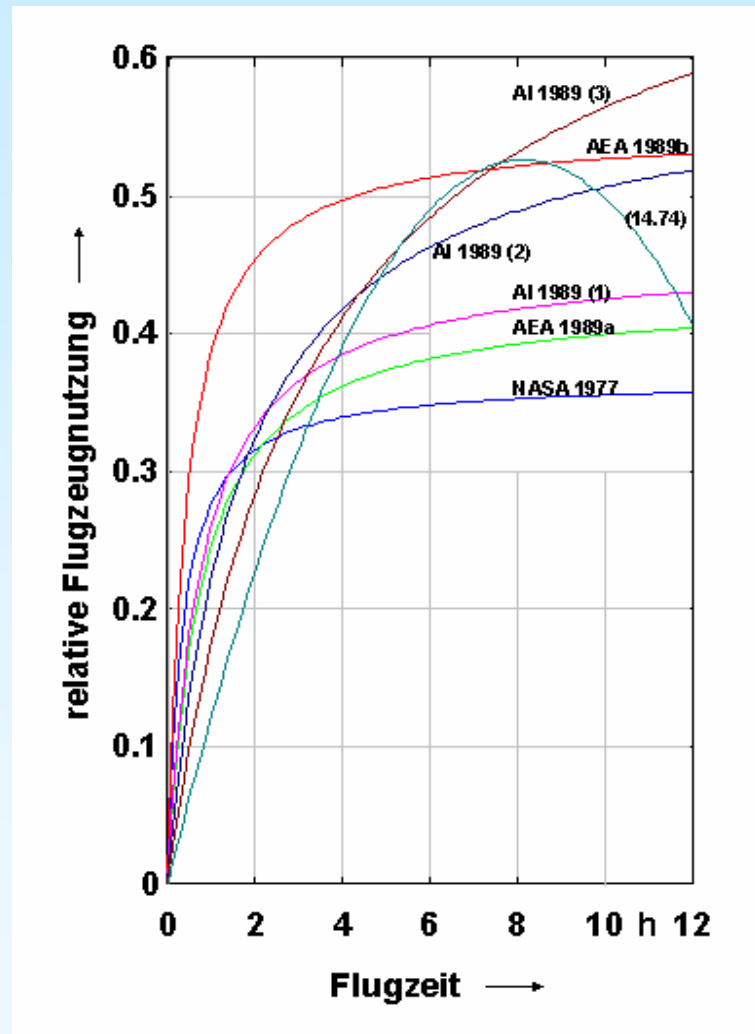

A/C DOC methods:

$$U_{a,f} = t_f \frac{k_{U1}}{t_f + k_{U2}}$$

Quelle	k_{U1} h	k_{U2} h
AA 1980 / NASA 77	3205	0.327
AEA 1989a	3750	0.750
AEA 1989b	4800	0.420
AI 1989 ^a		
$R < 1000$ nm	3994	0.754
$1000 \text{ nm} \leq R \leq$	5158	1.650
2000 nm (2)	6566	3.302
$2000 < R$ nm		

Recommended for DOCsys

$$U_{h,f} = k_{U,A} (t_f - k_{U,B})^2 + k_{U,C}$$

$$k_{U,A} = -0.00796 \text{ 1/h}^2$$

$$k_{U,B} = 8.124 \text{ h}$$

$$k_{U,C} = 0.525$$

$$n_{t,a} = U_{a,f} / t_f$$

t_f flight time

$$U_{a,f} = U_{h,f} \cdot 24 \cdot 365$$

List of References

- AEA 1989** ASSOCIATION OF EUROPEAN AIRLINES: *Short-Medium Range Aircraft AEA Requirements*, Brüssel : AEA, 1989 (G(T)5656)
- AEA 1989a** ASSOCIATION OF EUROPEAN AIRLINES: *Long Range Aircraft AEA Requirements*, Brüssel : AEA, 1989 (G(T)5655)
- Ahlefelder 2006** AHLEFELDER, Sebastian: *Kraftstoffverbrauch durch Entnahme von Zapfluft und Wellenleistung von Strahltriebwerken*. Hochschule für Angewandte Wissenschaften Hamburg, Projekt, 2006. – URL: <http://bibliothek.ProfScholz.de>
- AI 1988** AIRBUS INDUSTRIE: *Airbus Project D.O.C. Method*, Toulouse, 1988 (AI/TA - P812.076/88 ISS.1)
- AIR 1168** SOCIETY OF AUTOMOTIVE ENGINEERS: Aerospace Information Report 1168/8: Aircraft Fuel Weight Penalty Due to Air Conditioning, Warrendale : SAE, 1989
- Dechow 1994** DECHOW, M.; HEROLD, H.: *CONSUL, Berechnungsprogramm für die Ermittlung der Cost of Ownership für Systeme und LRUs*, Version 1.1, Deutsche Aerospace Airbus, Hamburg, 1994 (EZ32)
- Scholz 1998** SCHOLZ, Dieter: DOCsys - A Method to Evaluate Aircraft Systems. In: SCHMITT, Dieter (Ed.): *Bewertung von Flugzeugen* (Workshop: DGLR Fachausschuß S2 - Luftfahrtsysteme, München, 26./27. October 1998). Bonn : Deutsche Gesellschaft für Luft- und Raumfahrt, 1998
- BRIX** zitiert nach **Dechow 1994**.
-