
Simulink Report: FR_

Model - FR_





Tabelle 1.1. FR_ Simulation Parameters

<i>Solver</i> ode14x	<i>ZeroCross</i> on	<i>StartTime</i> 0.0 <i>StopTime</i> 10.0
<i>RelTol</i> 1e-3	<i>AbsTol</i> auto	<i>Refine</i> 1
<i>InitialStep</i> auto	<i>FixedStep</i> auto	<i>MaxStep</i> auto

Tabelle 1.2. FR_ Summary Information

<i>NumModelInputs</i>	N/A	<i>NumModelOutputs</i>	N/A
<i>NumVirtualSubsystems</i>	N/A	<i>NumNonvirtSubsystems</i>	N/A
<i>NumNonVirtBlocksInModel</i>	N/A	<i>NumBlockTypeCounts</i>	N/A
<i>NumBlockSignals</i>	N/A	<i>NumBlockParams</i>	N/A
<i>NumZCEvents</i>	N/A	<i>NumNonsampledZCs</i>	N/A

Systems

Name	Parent	Snapshot	Blocks	Signals
FR_	<root>		FR_	FR_<1> FR_<2>

Blocks

Tabelle 1.3. Block Type Count

BlockType	Count	Block Names
Inport	18	In_1, In_2, D, L, zeta, mode, p_in_1, rho_in_1, T_in_1, x_H2O_gas_in_1, x_CO2_in_1, x_H2O_liq_in_1, p_in_2, rho_in_2, T_in_2, x_H2O_gas_in_2, x_CO2_in_2, x_H2O_liq_in_2
Outport	11	rho, T, x_H2O_gas, x_CO2, x_H2O_liq, p_1, m_dot_air_1, p_2, m_dot_air_2, Out_1, Out_2
Constant	5	D, L, m_air, mode, zeta

BlockType	Count	Block Names
BusSelector	2	Bus Selector3, Bus Selector4
BusCreator	2	Bus Creator1, Bus Creator2
Terminator	1	Terminator
SubSystem	1	FR_
Stateflow (m)	1	Embedded MATLA Function
S-Function	1	SFunction
Demux	1	Demux

Data and Functions

Tabelle 1.4. Model Functions

Function Name	Parent Blocks	Calling string
NaN	FR_ FR_ FR_ FR_	NaN NaN NaN NaN

 **Function Block Parameters: FR_** 

Subsystem (mask)

Parameters

Diameter [m]

NaN

Length [m]

NaN

Minor Loss Coefficient

NaN

Mode = 0: State Variables = Average Input variables, Mode = 1: State Variables = Input Higher Pressure


NaN

OK

Cancel

Help

Apply

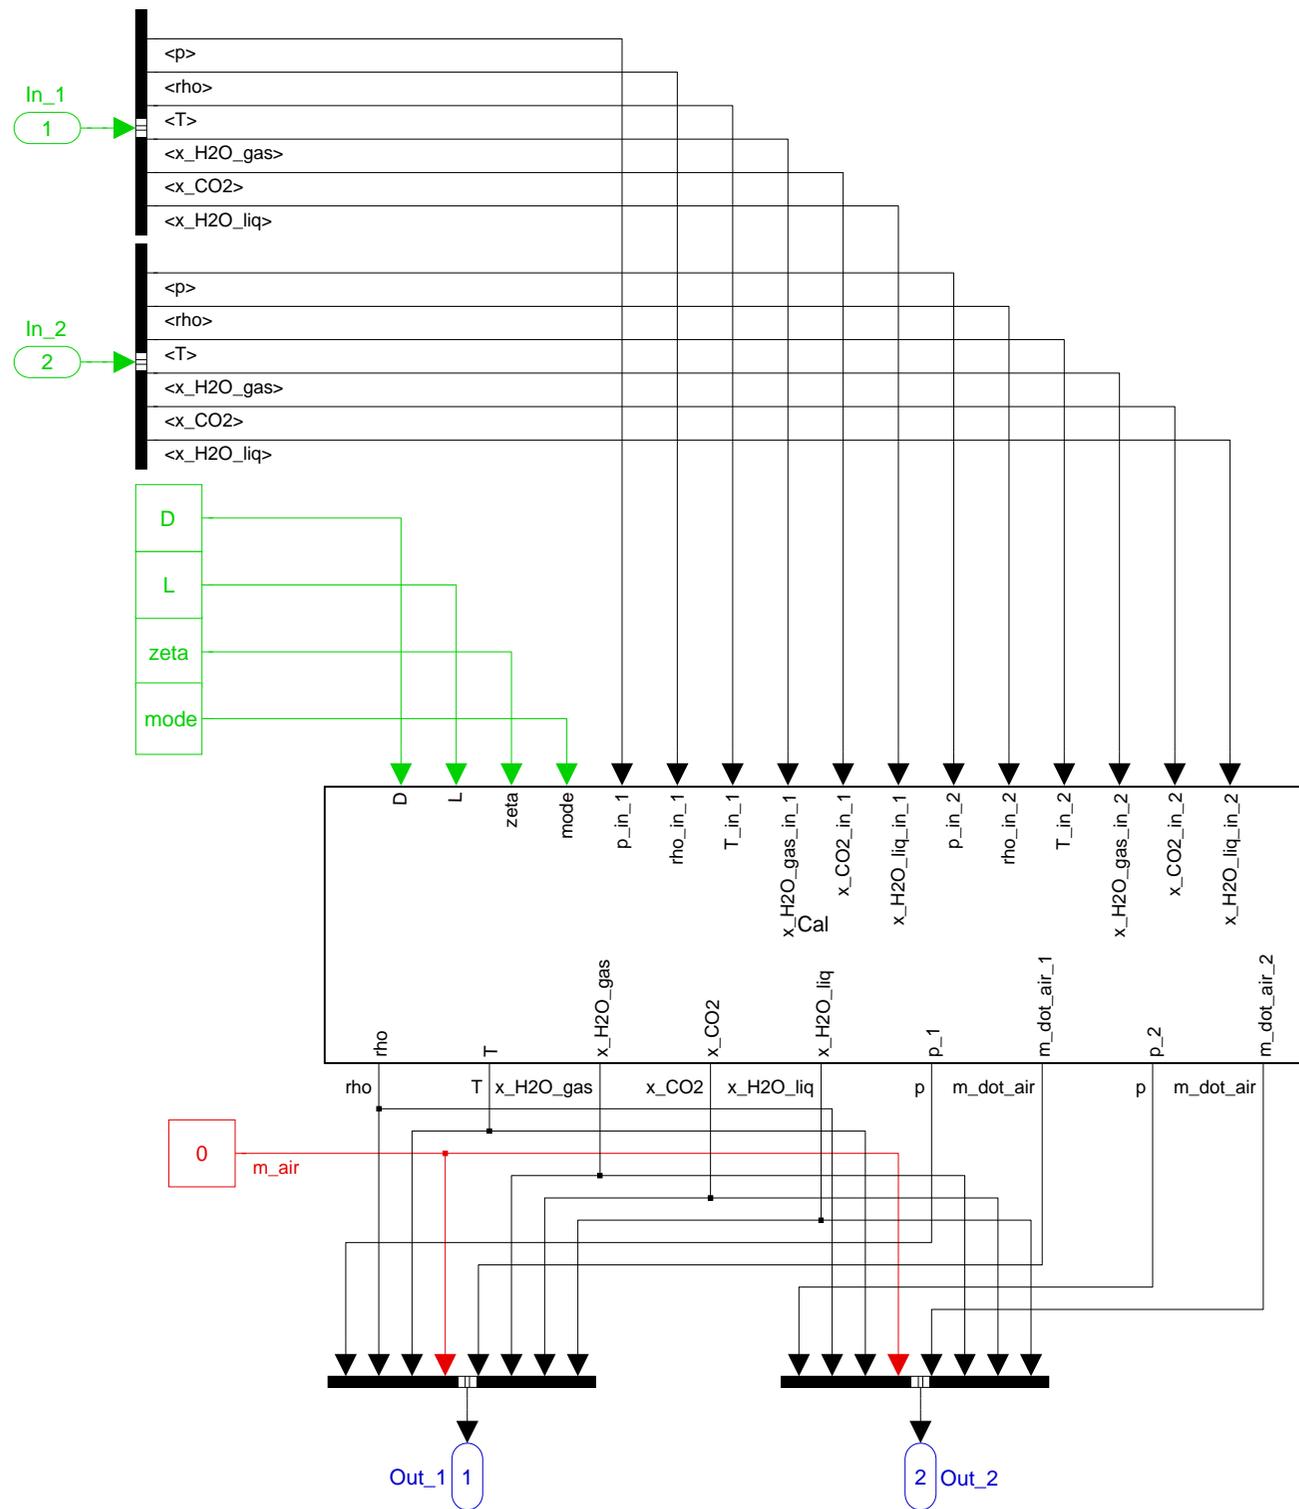

```
function [rho,T,x_H2O_gas,x_CO2,x_H2O_liq,p_1,m_dot_air_1,p_2,m_dot_air_2]=Cal(D,L,
zeta,mode,p_in_1,rho_in_1,T_in_1,x_H2O_gas_in_1,x_CO2_in_1,x_H2O_liq_in_1,p_in_2,
rho_in_2,T_in_2,x_H2O_gas_in_2,x_CO2_in_2,x_H2O_liq_in_2)
```

```
% *****
% * Definition of a flow resistance
% *
% * Number of inputs :           2
% *
% * Parameter: Diameter:         D
% *           Length:           L
% *           Minor loss coefficient: zeta
% *
% *
% * Relevant input variables of FR
% *
% * Pressure:                    p_in
% * Density:                    rho_in
% * Temperature:                T_in
% * Content water vapor:        x_H2O_gas_in
% * Content CO2:                x_CO2_in
% * Content water:              x_H2O_liq_in
% *
% *
% * Relevant output variables of FR
% *
% * Temperature:                T
% * Mass flow dry air:          m_dot_air
% * Content water vapor:        x_H2O_gas
% * Content CO2:                x_CO2
% * Content water:              x_H2O_liq
% *
% *
% *****
% * Embedded Matlab Function Cal:
% *
% * Calculations:
% * 1. Calculation parameter.
% * 2. Calculation of the state variables.
% * 3. Calculation average viscosity.
% * 4. Calculation flow velocity.
% *   4.1 Initial value of the flow velocity.
% * 5. Calculation mass flow.
% *
% *
% * Assumptions:
% * 2. Mode = 0: state variables = average input variables
% *   Mode = 1: state variables = input variables higher pressure
% * 3. The gas mixture inside the volume consists of water vapor (H2O_gas),
% *   CO2 and water (H2O_liq, state: fog).
% * 4. The intial value of the flow velocity is estimated by the law of
% *   Hagen-Poiseuille. Knowing the initial value of the velocity, the
% *   initial value of the Reynolds number can be calculated. The iterative
% *   while loop has a break condition of  $|v_{(i-1)}-v_{(i)}| < 0.001*v_{(i-1)}$ .
% *   The input pressures are cross linked. p_in_1 is transfered to the output
% *   p_1 and the other way around.
% * 5. The mass flow is calculated with a incompressible mass flow equation.
```

```

% * This equation is only applicable for systems with low flow velocities.
% *
% *
% * Last modification : 15.03.2008

% *
% *****

% * 1. Calculation parameter
A = (pi*(D/2)^2);
% *****

% * 2. Calculation of the state variables.
rho = 0;
T = 0;
x_H2O_gas = 0;
x_CO2 = 0;
x_H2O_liq = 0;

if mode == 0
    rho = (rho_in_1+rho_in_2)/2;
    T = (T_in_1+T_in_2)/2;
    x_H2O_gas = (x_H2O_gas_in_1+x_H2O_gas_in_2)/2;
    x_CO2 = (x_CO2_in_1+x_CO2_in_2)/2;
    x_H2O_liq = (x_H2O_liq_in_1+x_H2O_liq_in_2)/2;
end

if mode == 1
    if p_in_1 >= p_in_2
        rho = rho_in_1;
        T = T_in_1;
        x_H2O_gas = x_H2O_gas_in_1;
        x_CO2 = x_CO2_in_1;
        x_H2O_liq = x_H2O_liq_in_1;
    else
        rho = rho_in_2;
        T = T_in_2;
        x_H2O_gas = x_H2O_gas_in_2;
        x_CO2 = x_CO2_in_2;
        x_H2O_liq = x_H2O_liq_in_2;
    end
end
% *****

% * 3. Calculation average viscosity.
eta_air = 0.0000182;
eta_H2O_gas = 0.00000877;
eta_CO2 = 0.0000149;
eta = (eta_air+x_H2O_gas*eta_H2O_gas+x_CO2*eta_CO2)/(
(1+x_H2O_gas+x_CO2));
eta_kin = eta/rho;
% *****

% * 4. Calculation flow velocity
% * 4.1 Initial value of the flow velocity.

```

```

p_1          = p_in_2;
p_2          = p_in_1;
Delta_p      = p_in_1-p_in_2;
V_dot       = ((pi*(D/2)^4)*abs(Delta_p))/(8*eta*L);
v           = V_dot/A;
Re          = (v*D)/eta_kin;
% *****

% *****
if Re < 1
    Re          = 1;
end

check        = 1;

while check > 0

    if Re < 1187.384382
        lambda   = 64/Re;
        zeta_total = lambda*(L/D)+zeta;
        Z_v      = sqrt(abs(Delta_p)*(2/rho)*(1/zeta_total));

        if abs(v-Z_v) > (0.001*v)
            check = 1;
        else
            check = 0;
        end

        v        = Z_v;
        Re        = (v*D)/eta_kin;

        if Re < 1
            Re    = 1;
        end
    else
        lambda   = 0.3164*((Re)^(-0.25));
        zeta_total = lambda*(L/D)+zeta;
        Z_v      = sqrt(abs(Delta_p)*(2/rho)*(1/zeta_total));

        if abs(v-Z_v) > (0.001*v)
            check = 1;
        else
            check = 0;
        end

        v        = Z_v;
        Re        = (v*D)/eta_kin;
    end
end

% *****

% * 5. Calculation mass flow
m_dot        = A*rho*v;

if Delta_p >= 0
    m_dot_air_1 = -m_dot/(1+x_H2O_gas+x_CO2);
end

```

```
m_dot_air_2      = m_dot/(1+x_H2O_gas+x_CO2);  
else  
  m_dot_air_1    = m_dot/(1+x_H2O_gas+x_CO2);  
  m_dot_air_2    = -m_dot/(1+x_H2O_gas+x_CO2);  
end  
% *****
```